


| <u>Hardware</u>  |         |                                  |     |
|--|---------|----------------------------------|-----|
| Label  | Picture | Description                      | QTY |
| 1  |         | Bolt<br>(M6X <mark>45</mark> mm) | 4   |
| 2  |         | Allen Key                        | 1   |
| Assembly Preparation   |         |                                  |     |
| Before<br>Beginning<br>Assembly:   |         |                                  |     |
| <ul> <li>Read instructions, cover to cover-</li> <li>Have 2 adults on hand for assembly-</li> <li>Do not assemble on flooring or carpet-</li> <li>Assemble on a clean non-marring surface (packing foam)-</li> <li>Save all packaging until finished-</li> </ul> |         |                                  |     |



## Step 3

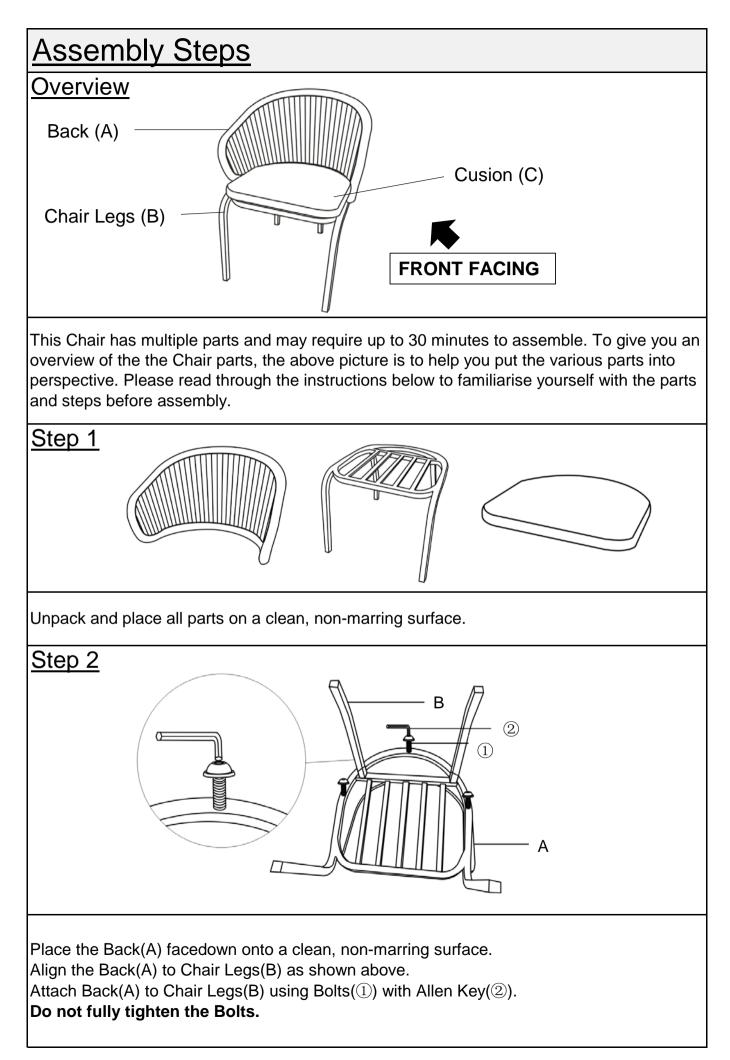

Stand the chair up.

Carefully exert pressure floorwards onto the chair with both your hands.

This pressure will help the Legs and chair Top reach full alignment status.

Check for wobbles on a LEVEL surface.


If no wobbles are found proceed to tighten the Bolts in a sequential manner, until evenly secured.

When tightening the Bolts tighten sequentially.


Do not tighten any Bolt fully and then move on towards the next one.

If there are still wobbles, loosen the Bolts and excute the same above process.

If the Chair is not Stable it could lead to damage to the product.

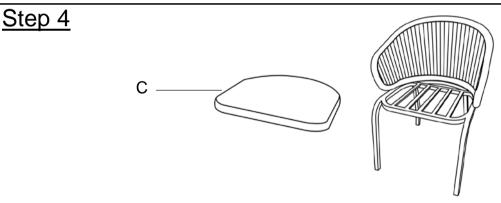

Put the Seat Cushion(C) onto the Chair.

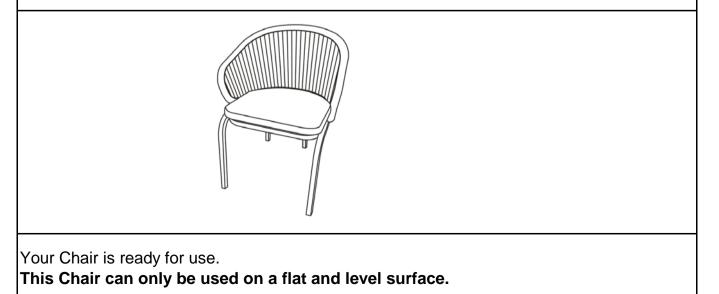

Page 4 OF 5

