


# Installation Instructions For Topmount Sink


Please carefully read complete instructions before beginning installation. these instructions are for installation with solid surface, composite material countertops. sink recommends professional countertop installers and is not responsible for damage to the countertop or sink during installation.




**1** Unpack the new sink and check the contents of the materials supplied : Sink ,Mounting brackets, and Cutout template (depending on model). Check the cut out template is the same as bowl inner size.A. Flush mount: Sink edge is flush with countertop opening.

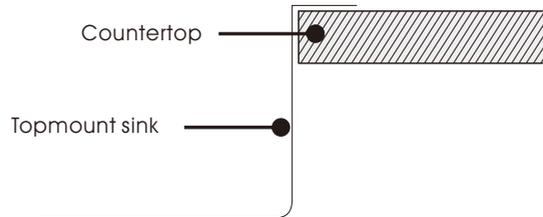


**2** Cut out the appropriate template for your sink model and desired installation option. Place template in desired position on countertop , locating center of the bowl over cabinet and faucet holes. Trace the line of the template and cut countertop according to templated size. using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cutout opening.

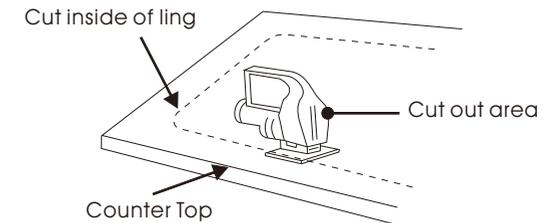


**3** Cut out the appropriate template for your sink model and desired installation option. Place template in desired position on countertop , locating center of the bowl over cabinet and faucet holes. Trace the line of the template and cut countertop according to templated size. using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cutout opening.

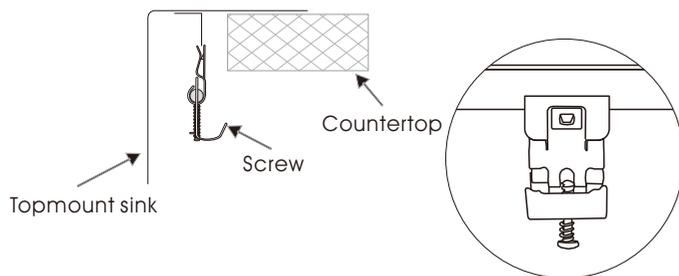

**4** Verify that the sink fits perfectly. The lip to the sink should be resting on the countertop.

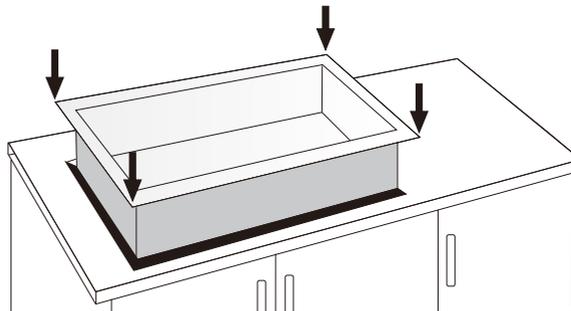


**5** Make proper water and waste pipe connections.

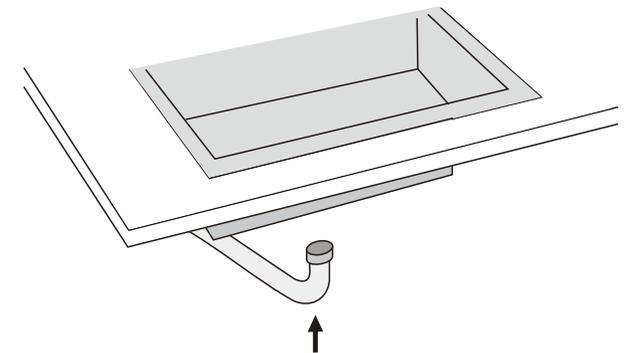


Install hot and cold water pipes

1

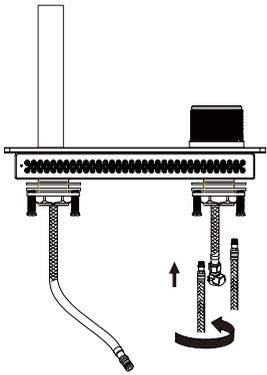


Remove mounting hardware from faucet body.

2

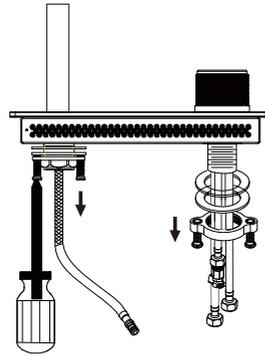


Insert the faucet into the sink opening and adjust.

3

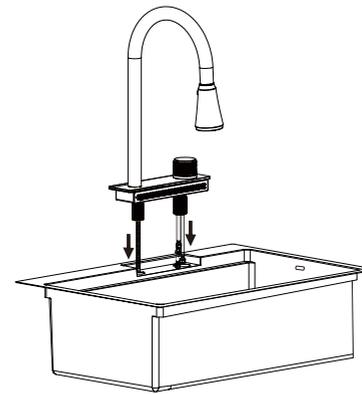


Install the rubber washer and metal washer onto the threaded mounting shank. Thread the nut onto the mounting shank. Lock the nut into position by tightening the screws. Do not overtighten.

4

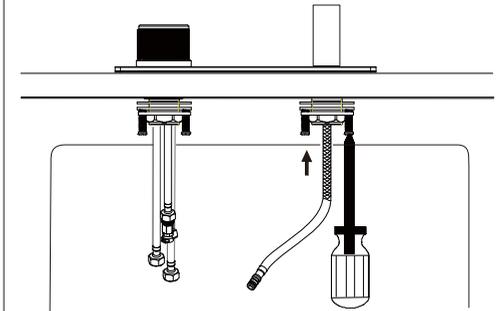


Push the quick connector firmly upward and attach it to the receiving block. Pull down moderately to ensure the connection has been made. Install the Weight & Clip Assembly.

5

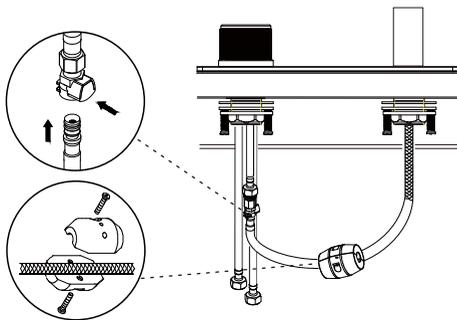


Thread the nut on the supply line onto the outlet of the water supply valve and tighten with a wrench. Do not overtighten.

6

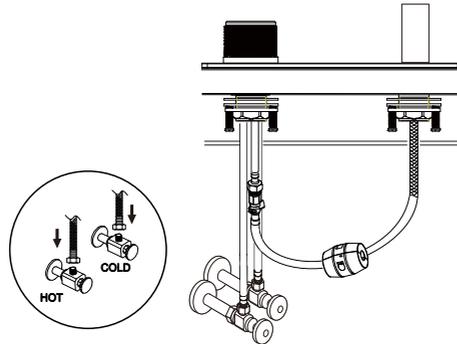


the sealant is coated on the edge of the drain pipe, the silicone sealing ring is stuck on the edge of the drain pipe.

7

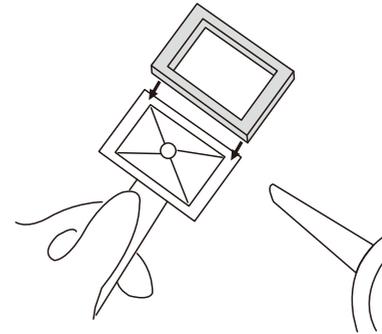


The drain pipe is aligned with the opening of the sink, pay attention to the screw hole of the drain pipe.

8

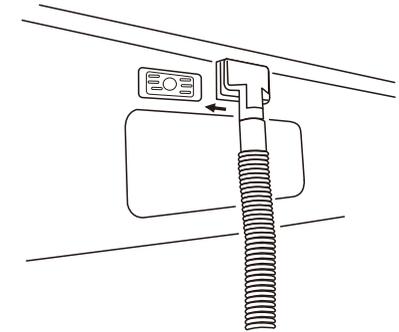


Use a screwdriver to fix the screw on the edge and strengthen the drain pipe;

9

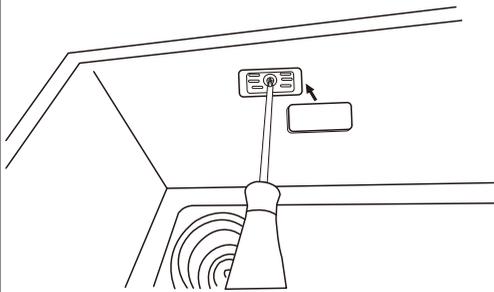

Connect the drainage hose to the drainage port.

10

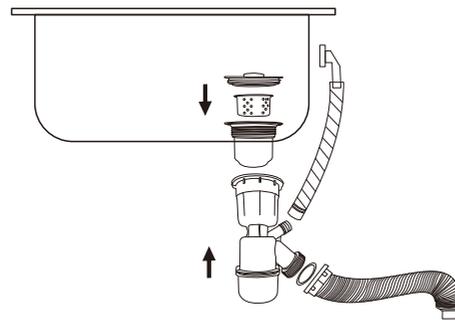

## Cleaning instructions

For all treated surfaces, wash the entire surface with mild soap and water, then dry the entire surface with a clean, soft cloth. Cleaning products that contain ammonia, decontamination powder, and products used on surfaces such as bathrooms should not be used, as they may damage galvanized surfaces. Abrasive cleaners or detergents should also not be used on faucets and accessories.