
## ASSEMBLY INSTRUCTIONS

L7003 (English)

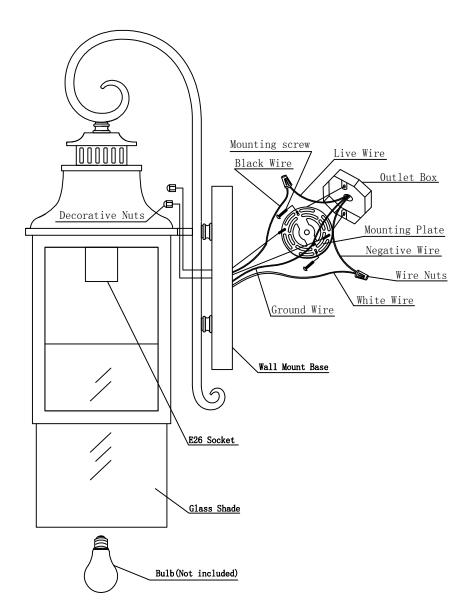

## READ & SAVE INSTALLATION & OPERATION INSTRUCTIONS TOOLS & MATERIALS REQUIRED

Screwdriver

• Wire Cutters

• Adjustable Wrench

• Wiring Supplies

#### **CAUTION**

Prior to assembly, refer to **ELECTRICAL CONNECTIONS** section. If you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

#### **GENERAL**

- 1. Be sure to read these instructions and review the diagrams thoroughly before beginning.
- 2. Electrical connections must be in accordance with local codes, ordinances, or the
- National Electric Code. If you are unfamiliar with methods of installing electrical
- wiring, secure the services of a qualified licensed electrician.
- 3. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing appropriate fuse at fuse box. Turning the power off at the light switch
- . is not sufficient to prevent electrical shock.

#### UNPACK THE FIXTURE

Check the contents of the wire connector. You should receive:

- Mounting Hardware Package
- · Unassembled Fixture

# PREPARE THE FIXTURE NOTE: First turn off electricity.

- 1. If replacing an existing fixture, disconnect and remove old fixture. Expose the supply wiring from wire connector.
- 2. If your fixture is supplied with two machine screws, thread the long machine screws into the opposite side of the anchors. While supporting the fixture, make electrical
- . connections.

## FINAL ASSEMBLY

- Spread electrical splices so Black wire are on one side of wire connector and White
   Wire on the other.
- 2. Install light bulbs (not provided) and cover assembly. Some models employ a twist off top cap to allow access to bulbs.
- **3. CAUTION**: Refer to the relamping gtl label located near lamp holder for recommended maximum wattage. Do not exceed recommended wattage.
- 4. Use weather resistant caulk to seal around top and side perimeter of fixture back plate.

  Leave bottom uncaulked to allow for condensation and evaporation.
- 5. Restore electrical power.