









# MF-4051-1

## INSTRUCTION MANUAL

### FITTINGS


- A.  \* 4    B.  \* 4    C.  \* 4    D.  \* 4
- E.  \* 4    F.  \* 2    G.  \* 1    H.  \* 1

### ASSEMBLY ICON




Tighten the product as shown in the figure above.




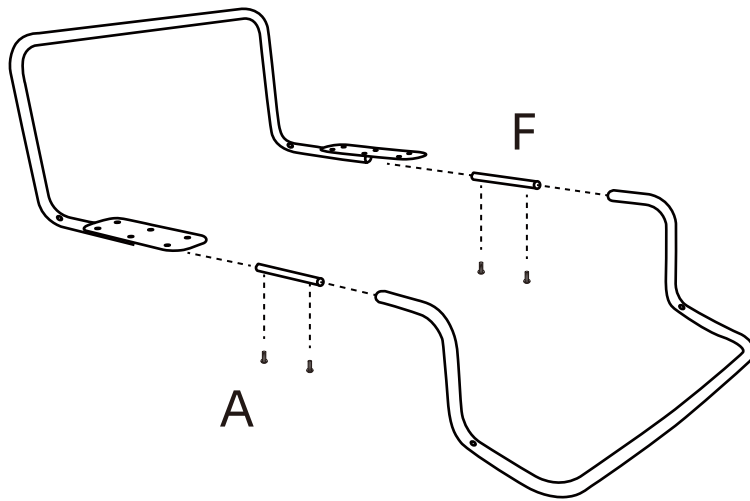


- 1、 Connect the two short metal rods to the back frame and secure them in place from the bottom using screws.

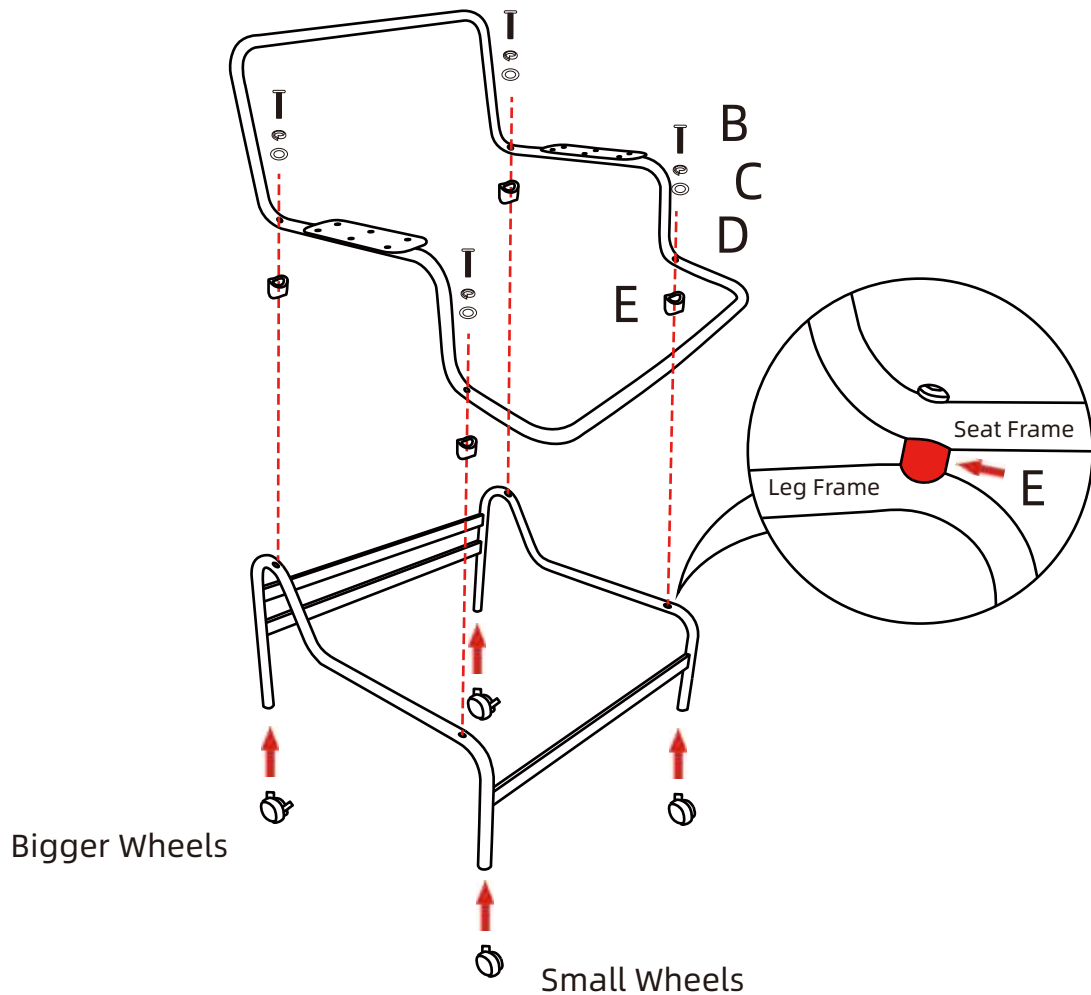


- 2、 Install the wheels directly into the frame, making sure the small wheels are in the front and the large wheels are in the back. Then, assemble the chair frame onto the frame as shown in the picture, ensuring that you don't tighten the screws 100% at first. Once all the screw holes are aligned, tighten them one by one.

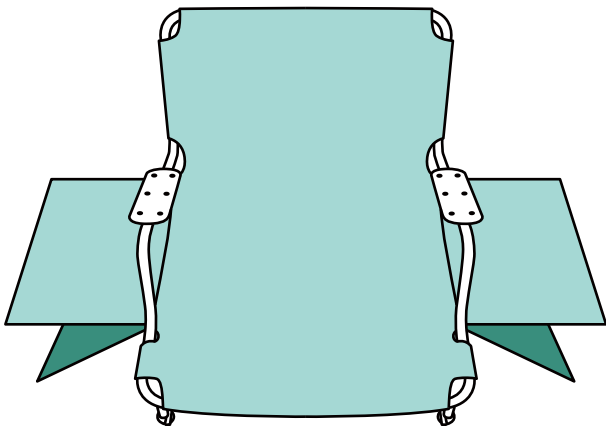


A. Please insert the black fabric cover into the backrest and seat cushion first.

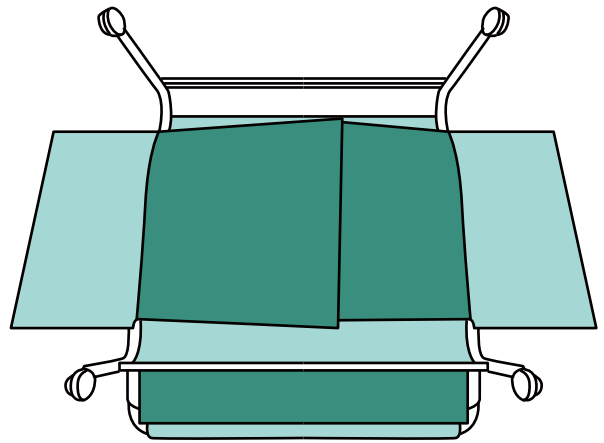

B. Invert the metal frame and fasten the inner side of the bottom fabric cover.


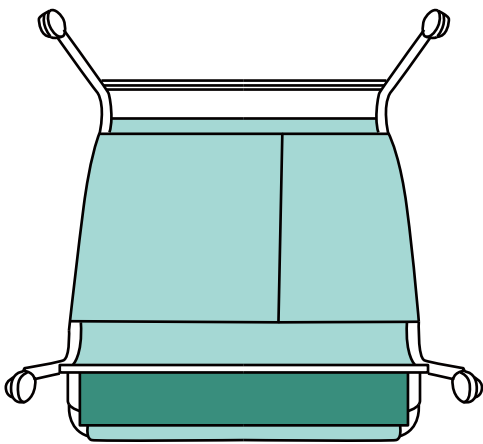


C. Then, attach the outer side of the left and right fabric covers.

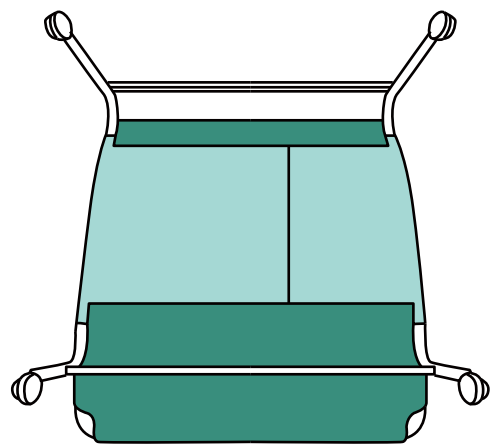

D. After that, use adhesive to attach and secure the front and back fabric covers together.

### 3、 Black Fabric Cover Assemble

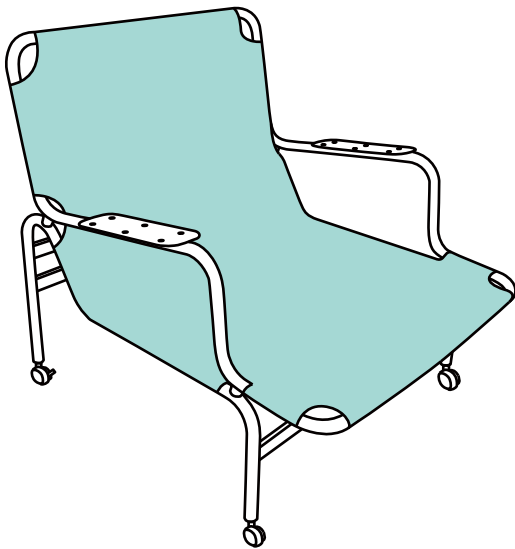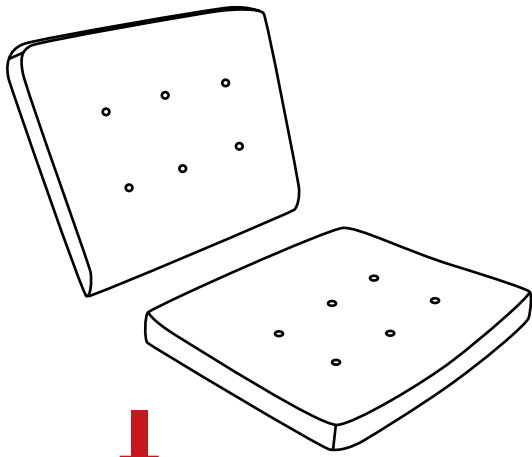

4. Put the seat cushion on first, and then put the backrest on top.



5. Attach the armrest pad to the armrest frame and secure it in place with adhesive. Once this is done, the installation is complete.